

Loudspeakers

# Party 15

Two-way, full range, passive, 15" loudspeaker for KTV



Optimal Audio



## FEATURES

- Wooden cabinet
- Portrait or landscape mounting options
- Rotatable high-frequency horn
- 58Hz – 18kHz frequency response  $\pm 3\text{dB}$
- Maximum SPL 126dB (continuous), 132dB (peak)
- 80° horizontal x 50° vertical coverage

Party 15 is a compact, two-way passive loudspeaker designed for KTV rooms which call for superior sound and effortlessly delivers warmth, clarity and smooth response with the vocal presence required for a great Karaoke experience.

Featuring a 15" (380mm) LF driver and a 1" (25mm) exit HF compression driver with a 1.4" (35mm) polyimide dome compression driver, Party 10 is capable of high output levels for its small size and its rotatable 90° x 50° HF horn provides extremely smooth coverage. Equal horizontal and vertical horn mouth dimensions ensure its excellent directivity control is maintained in the horizontal plane and the horn can be

easily rotated for operation in both portrait or landscape orientation.

Rear ports couple the low-frequency output to walls or ceiling, producing enhanced bass output that can be felt without the need for additional subwoofers. This is particularly useful where space or budget may not allow for subwoofer support.

Amp is the perfect amplifier partner, delivering high SPL for many hours, whilst the internal Party crossover network technology protects the low and high frequency drivers and assures reliability without interrupting the Karaoke performance.

## APPLICATIONS



KTV

CHINA ONLY




Loudspeakers

# Party 15

Two-way, full range, passive, 15" loudspeaker for KTV



Optimal Audio

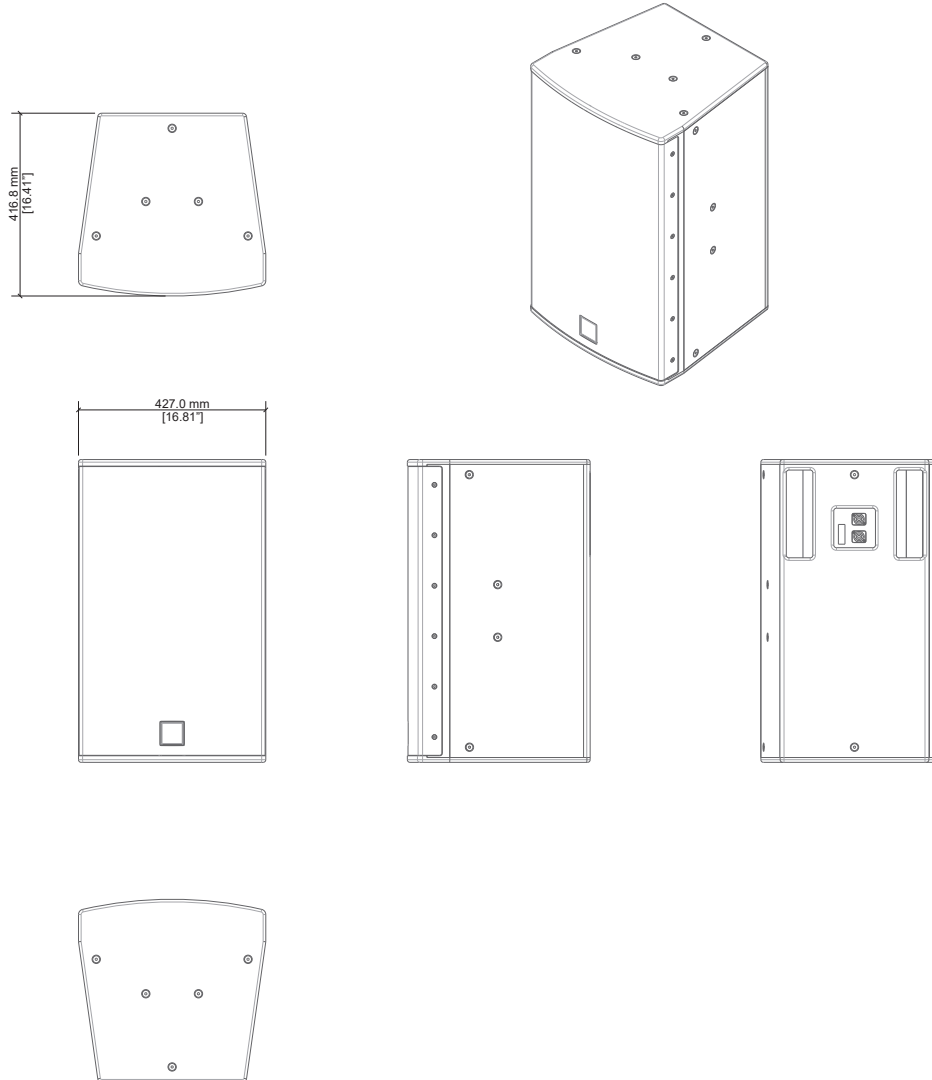

## SPECIFICATIONS

TYPE	Two-way, full range, passive loudspeaker
FREQUENCY RESPONSE (with preset)	58Hz - 18kHz ± 3dB -10dB @ 40Hz
DRIVERS	LF: 15" (380mm), ferrite motor system HF: 1" (25mm) exit/1.7" (44mm) voice coil, polyimide dome compression driver
RATED POWER	1000W (Program) 2000W (peak)
NOMINAL IMPEDANCE	8Ω
SENSITIVITY (1W/1m)	99dB
MAXIMUM SPL	126dB (cont), 132dB (peak)
RECOMMENDED AMP	Amp 200, Amp 300
CROSSOVER	2.3kHz passive
DISPERSION (-6dB)	80° H x 50° V (user-rotatable)
ENCLOSURE	Trapezoid wooden cabinet
FINISH	Black textured paint
PROTECTIVE GRILLE	Black perforated steel with scrim cloth backing
CONNECTORS	2x NL4 type
PIN CONNECTIONS (INPUT)	1+/1-, Link. 2+/2- Link through
FITTINGS	20 x M8, inset bolts
DIMENSIONS	(W) 426.5mm x (H) 691.5mm x (D) 416mm (W) 16.79" x (H) 27.22" x (D) 16.38"
WEIGHT	28kg (61.73lbs)
ACCESSORIES (available separately)	M8 eye bolt



Textured  
Paint Finish



Weight

[optimal-audio.co.uk](https://optimal-audio.co.uk)

© 2024. Optimal Audio Group Ltd.